LATEST INNOVATIONS IN FACADE FRAMING SYSTEMS



FEATURING





CLAD-LINE FRAMING & SUPPORT SOLUTIONS

CLAD-LINE IS ONE OF THE UK'S
LEADING MANUFACTURERS OF
EXTRUDED ALUMINIUM
NON-COMBUSTIBLE SUBFRAME
SYSTEMS. WITH OVER 30 YEARS OF
EXPERIENCE IN THE MANUFACTURE AND
SUPPLY OF RAINSCREEN SYSTEMS,
CLAD-LINE HAVE DEVELOPED A COMPLETE
SET OF FRAMING SOLUTIONS.

CLAD-LINE aim to simplify the design process, reduce installation time, and provide products which make everybody's life that little bit easier. What better way is there to do this than to work in conjunction with our valued customers and draw upon their first-hand industry knowledge to develop a structurally efficient and fully compliant subframe offering.

Servicing the new build and reclad/refurb markets, the key ethos of CLAD-LINE is innovation. Our team of qualified Design Engineers help to develop innovative solutions to overcome any challenges presented by the most complicated construction projects.


With the aid of CLAD-LINE's state-of-the-art and free to use Facade Engine software, CLAD-LINE can help any customer overcome project specific challenges and provide a comprehensive static calculation for their project requirements. A full Finite Element Analysis is also available to verify the performance of the more bespoke systems.

From the most simplistic but effective rail and bracket system, to the unique Floor 2 Floor framing technology, the CLAD-LINE range offers framing solutions for all design requirements, and can accommodate a diverse range of cladding materials.

CONTENTS


scaue Engine Specification Bulluel	
CL1 Subframe System	
CL2 Subframe System	
CL3 Subframe System	
CL4 Subframe System	7
F2F Rail System	8-9
CL1-S Soffit System	1C
Rails & Brackets	11-13
Environmental	14
Metalline	15


Facade Engine Specification Builder



- ANALYSE internal forces, support reactions and system deflections
 - **VERIFY** the analysed forces and deflections are lower than the system resistance
 - **OPTIMISE** your framing design by iterating system variables
 - Integrated wind load calculator
 - Fixing analysis and specification
 - Secondary support top hat analysis

Comprehensive analysis of the CL1, CL2 and CL3 bracket and rail systems as well as the unique Floor 2 Floor solution





FACADE ENGINE® SPECIFICATION BUILDER


A state-of-the-art analysis tool for all your rainscreen subframe requirements.



- CL1 is suited for a wide range of face fixed and discrete fixed cladding applications.
 - Ideal for new build and refurbishment.
 - CLAD-LINE's T and L profiled rails are fixed using the CL range of support brackets.
 - CLAD-LINE's range of support brackets come pre-fitted with a thermal isolation pad. This reduces installation time on site as well as improving the thermal performance of the bracket.



Non-combustible



Can be fixed back to both stud and masonry

Vertical cladding rails; Horizontal adaptor available

C 100% recyclable aluminium

Suitable for use with metal rainscreen, Rockpanel, fibre cement, HPL and ACM

£ Quick and easy to install



- CL2 is CLAD-LINE's subframe system suitable for supporting secret fixed cassette panels (Aluminium/Zinc/ACM).
 - The panel is secured using specially designed cassette hangers to provide the secret fix. The CL2 rail also incorporates a robust location for the panel's anti-uplift fixing.
 - CLAD-LINE's CL2 rails are fixed using the CL range of support brackets.



Non-combustible



Provides a secret fix for a metal rainscreen cassette



Incorporates a shadow joint cover plate slot



High strength, robust rail



Quick and easy to install



Can be fixed back to both stud and masonry





- CL3 is CLAD-LINE's subframe system for mechanically secret fixed applications, suitable for use with Rockpanel, high-pressure laminate (HPL), ceramic, thin stone and fibre cement.
 - CL3 panel hangers which are secured to the rear face of the cladding panel simply 'hook-on' to the horizontal rails.
 - The CL3 horizontal rails can be fixed back to the CL1, CL4 or CLF2F systems.



Non-combustible




Ideal for new build and refurbishment

Pre-fitted thermal isolator pad to brackets

Hook-on panel installation

Adjustable hangers

, 100% recyclable aluminium



Suitable for rainscreens with a shallow cladding zone (25mm or 40mm), this system can be used with a wide range of face fixed cladding panels.

A,

Subframe System

Non-combustible

Suitable for use with Rockpanel, HPL, ceramic, stone and fibre cement

· Ideal for new build and refurbishment


Faced fixed panel installation


E Cost effective installation

Cavity range from 25mm to 40mm

100% recyclable aluminium



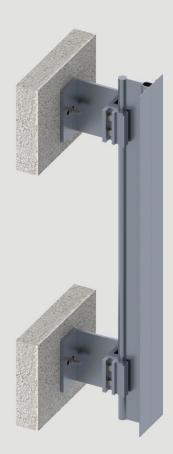



- A FLOOR 2 FLOOR rainscreen cladding framing system that saves time and money on installation costs, allows for maximum adjustment and reduces the need for fixings and brackets by up to 90%.
 - The F2F system reduces the requirement for multiple 'helping hand' brackets and supporting top hats and can be used to support different types of cladding materials including aluminium, Rockpanel, fibre cement, stone, ceramic and brick slip.
 - CLAD-LINE's F2F system together with Metalline's direct fix and secret fix cladding has been rigorously tested to CWCT standards:
 - 式 Wind resistance (2400Pa serviceability & 3600Pa safety)
 - Oynamic water resistance
 - **⊗** Impact resistance (hard body & soft body)





- CLAD-LINE'S CL1-S soffit system is suitable for face fixed and discrete fixed soffits.
 - Soffits to un-heated areas are frequently not insulated but if thermal bridging is an
 issue, flat isolation pads can be supplied to limit thermal transmission and prevent
 bimetallic corrosion.
 - T rails are fixed to the bottom of the 'dropper' L rails where panel joints occur. For intermediate and panel end support, CLAD-LINE'S L rails can be used.
 - CLAD-LINE hold extensive stock of both T and L rails and can fabricate in house to exact customer requirements. The CL1-S system can also be used to create sloping soffits through cutting of the rails to the required angle.

CLAD-LINE SINGLE SUPPORT BRACKET

Description	Product Code	Range
Single Bracket 90mm	CL-SB90	95-125mm
Single Bracket 120mm	CL-SB120	125-155mm
Single Bracket 150mm	CL-SB150	155-185mm
Single Bracket 180mm	CL-SB180	185-215mm
Single Bracket 210mm	CL-SB210	215-245mm
Single Bracket 240mm	CL-SB240	245-275mm
Single Bracket 270mm	CL-SB270	275-305mm
Single Bracket 300mm	CL-SB300	305-335mm





CLAD-LINE DOUBLE SUPPORT BRACKET

Description	Product code	Range
Double Bracket 90mm	CL-DB90	95-125mm
Double Bracket 120mm	CL-DB120	125-155mm
Double Bracket 150mm	CL-DB150	155-185mm
Double Bracket 180mm	CL-DB180	185-215mm
Double Bracket 210mm	CL-DB210	215-245mm
Double Bracket 240mm	CL-DB240	245-275mm
Double Bracket 270mm	CL-DB270	275-305mm
Double Bracket 300mm	CL-DB300	305-335mm



CLAD-LINE SUPPORT RAILS


*Powder Coated & Anodised finishes available on request
*Can be cut to size on request. £tbc

ADDITIONAL PRODUCTS

Description	Product Code
CL1 Horizontal Adaptor 86mm	CL1-HA/86
CL1 Soffit Bracket Standard	CL1-S/BRKT/STD
CL1 Soffit Hanger	CL1-S/HANGER
CL2 Gasket (M)	CL2-GASKET
CL2 Hook	CL2-HOOK
CL3 Hanger Bracket Standard	CL3-H/BRKT/STD
CL3 Hanger Bracket Adjustable	CL3-H/BRKT/ADJ
CL3 Hanger Bracket Fixed Point	CL3-H/BRKT/FP
Single Isolator Pad	CL-SINGLEPAD
Double Isolator Pad	CL-DOUBLEPAD
Single A2 Isolator Pad	CL-SINGLEPAD/A2
Double A2 Isolator Pad	CL-DOUBLEPAD/A2

Rails & Brackets

Description	Product Code
CL1 L Rail 60 x 40 3000mm	CL1-60X40L/3000
CL1 L Rail 60 x 40 6000mm	CL1-60X40L/6000
CL1 T Rail 100 x 60 3000mm	CL1-100X60T/3000
CL1 T Rail 100 x 60 6000mm	CL1-100X60T/6000
CL1 T Rail 100 x 40 3000mm	CL1-100X40T/3000
CL1 T Rail 100 x 40 6000mm	CL1-100X40T/6000
CL1 T Rail 80 x 60 3000mm	CL1-80X60T/3000
CL1 T Rail 80 x 60 6000mm	CL1-80X60T/6000
CL1 T Rail 120 x 60 3000mm	CL1-120X60T/3000
CL1 T Rail 120 x 60 6000mm	CL1-120X60T/6000
CL1 T Rail 140 x 60 3000mm	CL1-140X60T/3000
CL1 T Rail 140 x 60 6000mm	CL1-140X60T/6000
CL2 Rail 3000mm	CL2-RAIL/3000
CL2 Rail 6000mm	CL2-RAIL/6000
CL3 Rail 3000mm	CL3-RAIL/3000
CL3 Rail 6000mm	CL3-RAIL/6000
CL4 Top Hat (120 x 25) 45 x 25 x 35 3000mm	CL4-TH/120X25/3000
CL4 Top Hat (120 x 25) 45 x 25 x 35 6000mm	CL4-TH/120X25/6000
CL4 Top Hat (140 x 40) 55 x 40 x 35 3000mm	CL4-TH/140X40/3000
CL4 Top Hat (140 x 40) 55 x 40 x 35 6000mm	CL4-TH/140X40/6000
CL4 Zed 45 x 25 x 32 3000mm	CL4-ZED/45X25/3000
CL4 Zed 45 x 25 x 32 6000mm	CL4-ZED/45X25/6000
CL4 Zed 55 x 40 x 32 3000mm	CL4-ZED/55X40/3000
CL4 Zed 55 x 40 x 32 6000mm	CL4-ZED/55X40/6000














FLOOR 2 FLOOR PRODUCTS

Description	Product Code
BS Link Bracket 75mm	CLF2F-BS/BRKT/75
BS Link Bracket 100mm	CLF2F-BS/BRKT/100
BS Link Bracket 150mm	CLF2F-BS/BRKT/150
Fixed Point Clip 50mm	CLF2F-Q/CLIP/50
Sliding Point Clip 150mm	CLF2F-Q/CLIP/150
225mm Angle Bracket 75mm	CLF2F-225/ANG/BRKT/75
225mm Angle Bracket 125mm	CLF2F-225/ANG/BRKT/125
Rail Type 1 3000mm	CLF2F-RAIL1/3000
Rail Type 1 6000mm	CLF2F-RAIL1/6000
Rail Type 2 3000mm	CLF2F-RAIL2/3000
Rail Type 2 6000mm	CLF2F-RAIL2/6000
Rail Type 3 3000mm	CLF2F-RAIL3/3000
Rail Type 3 6000mm	CLF2F-RAIL3/6000

SUSTAINABLE FRAMING SOLUTIONS

At CLAD-LINE we are devoted to ensuring our products are developed to be sustainable enough to last a typical facade's lifetime. We hope our decisions in the design and manufacturing process will lead to a more environmentally friendly future in the cladding industry. Our aim is to eliminate as much waste and pollution as possible, and make our products more environmentally friendly.

CLAD-LINE's systems use Aluminium across the board which means our entire range is 100% recyclable. We have chosen our suppliers not just on their performance to extrude material but their green credentials too. Our systems are manufactured in the UK and use approximately 40% recycled aluminium. Our supplier's ambition is to further increase their share of recycled aluminium and lower CO_2 emission aluminium in percentage to their overall metal requirements by 25% by 2025 from a 2020 baseline, thus increasing CLAD-LINE's share and reducing the overall supply chain CO_2 emissions.

CLAD-LINE ensure wood and cardboard for packing is sourced through local providers committed to responsible sources and waste management, plastic sheeting has a minimum 30% recycled content and pack banding has a minimum of 97% recycled content.


As the world evolves, companies should too. That's why we are striving to minimise our environmental impact through creating our Subframe Systems out of recyclable aluminium.

HELP US BUILD A SUSTAINABLE FUTURE

Our products are as eco-friendly as we believe they can be, yet we are constantly changing. If you have any suggestions on how we can improve our sustainability, please don't hesitate to speak to us.

100% Recyclable 40%*
Recycled
Aluminium

*Approximately

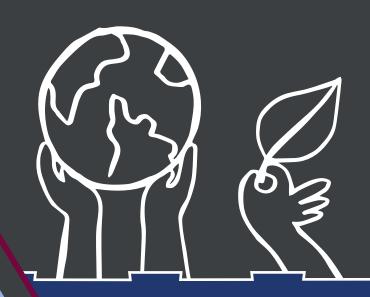



Metalline are one of the leading fabricators within the facade industry. Investment in manufacturing equipment and staff training has meant that Metalline continues to grow and deliver quality products to their clients.

Metalline offer a wide range of fire rated aluminium rainscreen cladding panels and facade systems. Perfect for use on a diverse range of construction projects. Our new Unity fire rated rainscreen cladding has undergone testing to BS EN13501-1 and achieved both A1 and A2 - s1,d0 classifications.

www.metalline.co.uk | +44(0)1543 456 930 | sales@metalline.co.uk











Aluminium Rainscreen Cladding

Metalline also offers the Ultima range of Insulated Spandrel panels which has undergone testing to BS EN13501-1 and achieved both A1 and A2 - s1,d0 classifications.

The Ultima Insulated Spandrel Panel can be constructed using a range of face finishes dependant upon the classification required, the thickness of the insulation can also be varied to accommodate 'U' values on your project.

Contact us today to discuss your next project and see how we can help you with the complete system.





FRAMING SOLUTIONS

CLAD-LINE Framing Solutions

Unit 4, Primary Point, Progress Drive, Cannock, Staffordshire, WS11 0JF www.clad-line.com | +44 (0)1543 222 500 | sales@clad-line.com